


Code: CORC



MAGNAT aludoormat from STILMAT is the best value deal . It is like successful entrepreneur or investor, who knows what is the right choice. It is a modern design aluminum doormat, with 20 mm height, profiled rubber inserts and high quality dust control carpet. More space between profiles guarantee to collect more dirt. Ideal for medium pit depth for picking up coarse dirt, fine dirt and moisture. Suitable for internal use, for entrances with normal visitor frequency. Imagine your impressive entrance with MAGNAT STILMAT doormat.



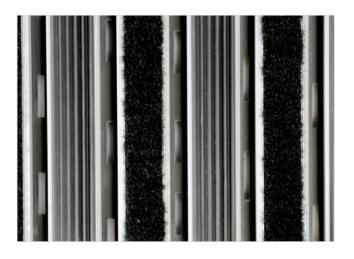


The weather-proof solution

Ideal for: Coarse dirt, fine dirt and moisture

Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys

Aluminum coating: Fully anodized

Logo options: Logo engraving





STILMAT MAGNAT

Rubber/Carpet - open

Code: CORC

Tread surface (inlay):Profiled rubber inserts and high quality dust control carpet, durable and luxurious character. Made from 100% Polyamide. Weather-proofColors:Black, Grey, BrownIdeal forCoarse dirt, fine dirt and moistureVersionOpen systemCodeCORCApprox. height (mm)20Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: I II IIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid aluminum with rubber sound insulation underlay	Model	MAGNAT (Rubber & Carpet)
Ideal forCoarse dirt, fine dirt and moistureVersionOpen systemCodeCORCApprox. height (mm)20Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: I II IIIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Tread surface (inlay):	
VersionOpen systemCodeCORCApprox. height (mm)20Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: I II IIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Colors:	Black, Grey, Brown
CodeCORCApprox. height (mm)20Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: I II IIIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Ideal for	Coarse dirt, fine dirt and moisture
Approx. height (mm)20Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: I II IIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Version	Open system
Entrance positionCovered outdoor areas, gateways, passages, indoorsZones: III IIIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Code	CORC
Zones: III IIIIILoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Approx. height (mm)	20
LoadNormalFootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Entrance position	Covered outdoor areas, gateways, passages, indoors
FootfallDaily footfall up to 1000Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleys	Zones: I II III	П
Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys	Load	Normal
	Footfall	Daily footfall up to 1000
Support chassis Made from rigid aluminum with rubber sound insulation underlay	Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
	Support chassis	Made from rigid aluminum with rubber sound insulation underlay
Aluminum material thickness (mm) 1.0	Aluminum material thickness (mm)	1.0
Connection Strong and flexible PVC connection strip, the entire width	Connection	Strong and flexible PVC connection strip, the entire width
Standard profile clearance approx. (mm) 7.5 mm	Standard profile clearance approx. (mm)	7.5 mm
Slip resistance R 11 slip resistance as per DIN 51130	Slip resistance	R 11 slip resistance as per DIN 51130
Max width/profile length for each 6000 individual section (mm):		6000
Max depth/walking depth for individual Any units (mm):		Any
Mat divisions as per factory standards or customer specifications Recommended maximum mat weight of 45 kg		Recommended maximum mat weight of 45 kg
Depth for individual units (mm): Cca 20	Depth for individual units (mm):	Cca 20
Stationary load kg/100cm ² 1500	Stationary load kg/100cm ²	1500
Weight (kg/m ²) Cca 18	Weight (kg/m²)	Cca 18
Logo options Logo engraving	Logo options	Logo engraving
Contact STILMAT	Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction

