

2
ZONE


24
HEIGHT (mm)




STILMAT PRESIDENT

Lux Brush/Carpet - closed

Code: SCBC

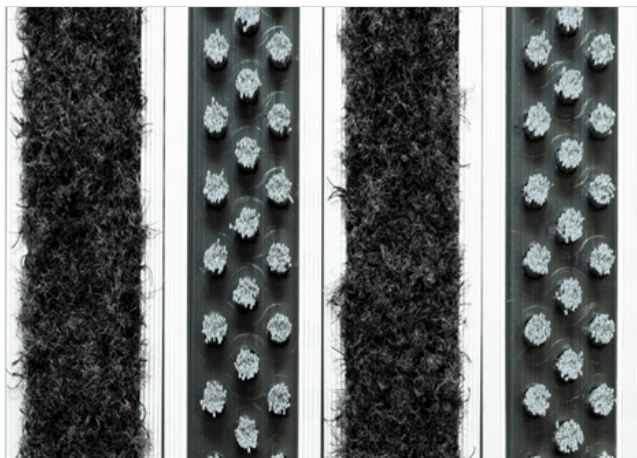

The PRESIDENT of all aluminum doormats. Base model from which everything starts. Proven design, rigid profiles. The alternative system with closed design. Imagine your impressive entrance with PRESIDENT STILMAT doormat. Suitable for internal use and for heavy to extreme frequency of passengers. This model is ideal for picking up coarse dirt, fine dirt and moisture. Anodized aluminum doormat model with 24mm height. This model is with thorough brushes for an extra cleaning effect and high quality dust control carpet. The weather-proof solution among the robust solution.

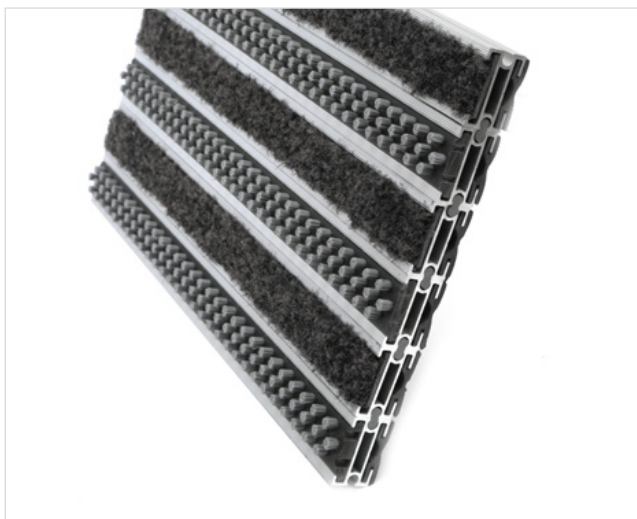

Ideal for: Coarse dirt, fine dirt and moisture



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving

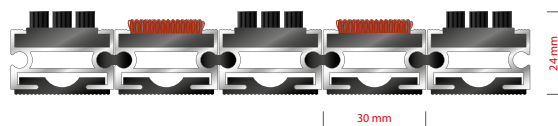

STILMAT PRESIDENT

Lux Brush/Carpet - closed

Code: SCBC

| Model | PRESIDENT (Lux Brush & Carpet) |
|---|---|
| Tread surface (inlay): | Lux brushes recessed, robust and high quality dust control carpet, durable and luxurious character. Made from 100% Polyamide. Weather-proof |
| Ideal for | Coarse dirt, fine dirt and moisture |
| Colors: | Black, Grey, Brown... |
| Version | Closed system |
| Code | SCBC |
| Approx. height (mm) | 24 |
| Entrance position | Covered outdoor areas, gateways, passages |
| Zones: I – II - III | Zone: II |
| Load | Extreme |
| Footfall | Daily footfall of 2000 and up |
| Roll-over and drive-over capability: | Wheelchairs, Prams, Hand and Light shopping trolleys |
| Support chassis | Made from rigid anodized aluminum with rubber sound insulation underlay |
| Aluminum coating: | Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum. |
| Aluminum material thickness (mm) | 1.2 |
| Connection | Strong PVC connection strip, the entire width |
| Standard profile clearance approx. (mm) | 0 mm closed system |
| Slip resistance | R 11 slip resistance as per DIN 51130 |
| Max width/profile length for each individual section (mm): | 6000 |
| Max depth/walking depth for individual units (mm): | Any |
| Mat divisions as per factory standards or customer specifications | Recommended maximum mat weight of 45 kg |
| Depth for individual units (mm): | Cca 24 |
| Stationary load kg/100cm ² | 2200 |
| Weight (kg/m ²) | Cca 25 |
| Logo options | Logo engraving |
| Contact | STILMAT |

Garancija: 5 godina na aluminijumske delove i konstrukciju