


**2**  
ZONE


**14**  
HEIGHT (mm)

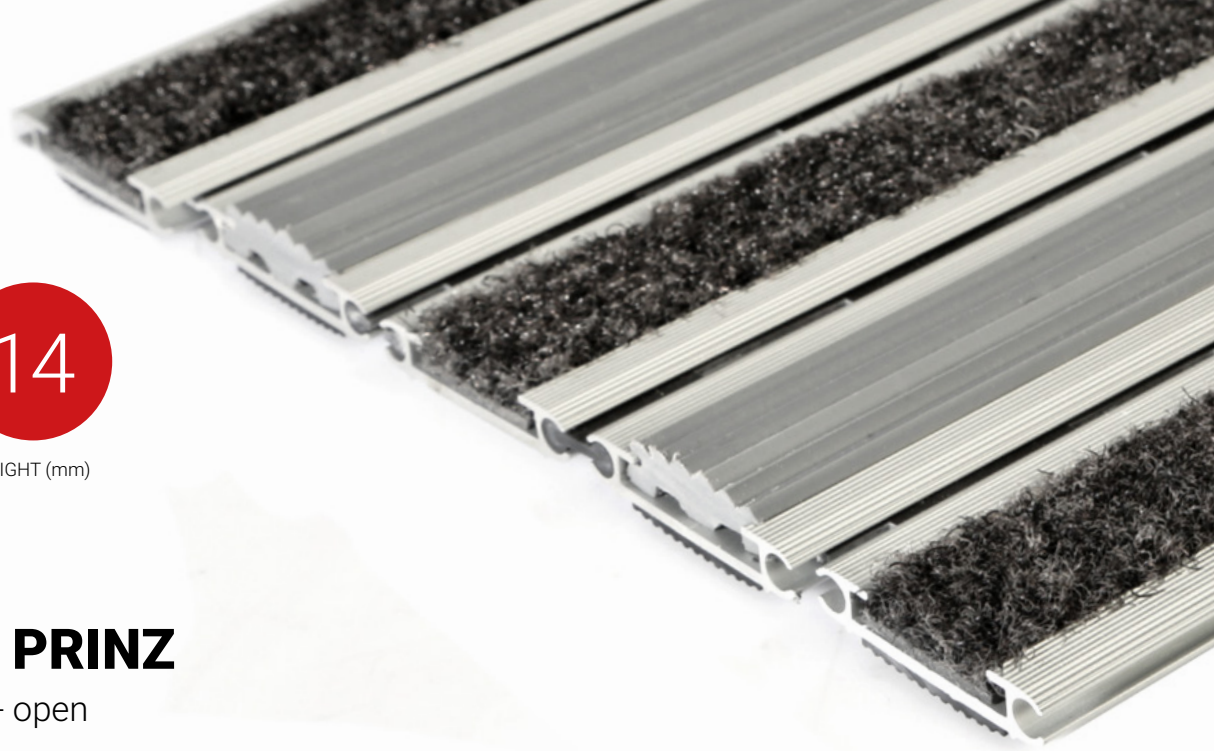


## STILMAT PRINZ

Rubber/Carpet - open

Code: JORC

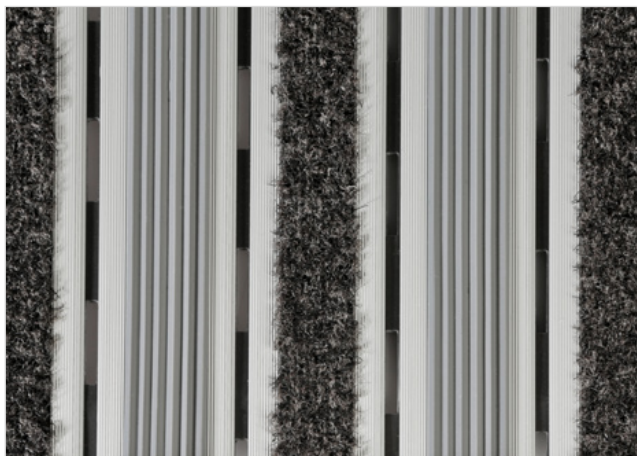

PRINZ is famous and the lowest model of STILMAT alu doormats. Ideal for small pit depth for picking up coarse dirt, fine dirt and moisture. Anodized aluminum doormat model which is only 14mm high, with profiled rubber inserts and high quality dust control carpet. The weather-proof solution for entrances with normal to heavy visitor frequency. Imagine your impressive entrance with PRINZ STILMAT doormat. Suitable for internal use. Flexible and roll-up, entrance mats produced to fit width and walking depth specifications perfectly. Suitable for wheeled traffic. Any geometric shape is available on demand.

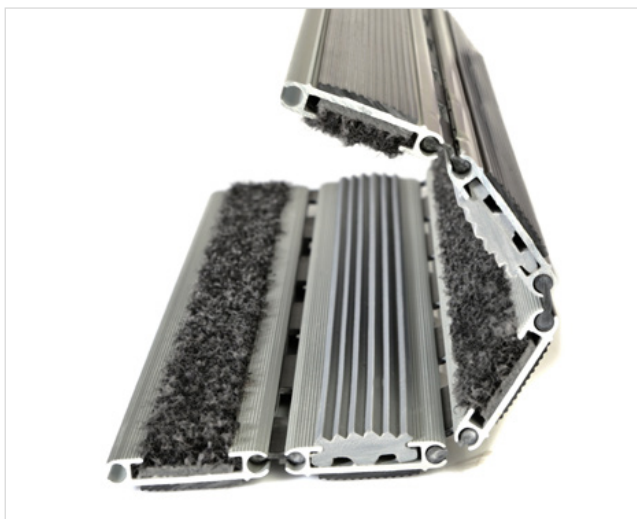

Ideal for: Coarse dirt, fine dirt and moisture



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving



# STILMAT PRINZ

Rubber/Carpet - open

**Code: JORC**

Model	PRINZ (Rubber & Carpet)
Tread surface (inlay):	Profiled rubber inserts and high quality dust control carpet, durable and luxurious character. Made from 100% Polyamide. Weather-proof
Ideal for	Coarse dirt, fine dirt and moisture
Colors:	Black, Grey, Brown...
Version	Open system
Code	JORC
Approx. height (mm)	12
Entrance position	Covered outdoor areas, gateways, passages
Zones: I – II - III	Zone: II
Load	Heavy
Footfall	Daily footfall up to 1000
Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
Support chassis	Made from rigid anodized aluminum with rubber sound insulation underlay
Aluminum coating	Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum
Aluminum material thickness (mm)	1.2
Connection	Strong and flexible PVC connection strip, the entire width
Standard profile clearance approx. (mm)	5 mm (or 3mm for automatic/revolving doors)
Slip resistance	R 10 slip resistance as per DIN 51130
Max width/profile length for each individual section (mm):	6000
Max depth/walking depth for individual units (mm):	Any
Mat divisions as per factory standards or customer specifications	Recommended maximum mat weight of 45 kg
Depth for individual units (mm):	Cca 14
Stationary load kg/100cm <sup>2</sup>	1650
Weight (kg/m <sup>2</sup> )	Cca 14
Logo options	Logo engraving
Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction