


Code: BCBC



The alternative system with closed design. Imagine your impressive entrance with BARON STILMAT doormat. Suitable for internal use and for heavy to extreme frequency of passengers. This model is with thorough brushes for extra cleaning effect and high quality dust control carpet, ideal for picking up coarse dirt, fine dirt and moisture. Anodized aluminum doormat model with 30mm height and high quality dust control carpet . The weather-proof solution among the robust solution.



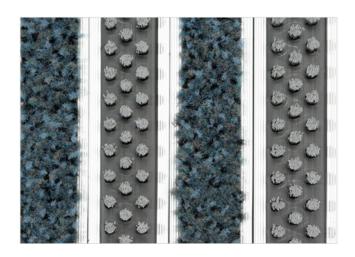

The weather-proof solution

Ideal for: Coarse dirt, fine dirt and moisture


Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving





STILMAT BARON

Lux Brush/Carpet - closed

Code: BCBC

Tread surface (inlay):Lux brushes recessed, robust and high quality dust control carpet, durable and luxurious character. Made from 100% Polyamide. Weather-proofIdeal for:Coarse dirt, fine dirt and moistureColors:Black, Grey, BrownVersionClosed systemCodeBCBCApprox. height (mm)30Entrance positionCovered outdoor areas, gateways, passagesZones: I - II - IIIZone: IILoadExtremeFootfallDaily footfall of 5000 and upRoll-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)Go00Max width/profile length for each individual section (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Logo options:Cca 30Keight (kg/m²)Cca 30Logo options:Logo engravingContactSTILMAT	Model	BARON (Lux brush & Carpet)
Colors:Black, Grey, BrownVersionClosed systemCodeBCBCApprox. height (mm)30Entrance positionCovered outdoor areas, gateways, passagesZones: I - II - IIIZone: IILoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prans, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlagAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (rmm):6000Mat divisions as per factory standards or sustomer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Veight (kg/m²)Cca 30Logo options:Logo engraving	Tread surface (inlay):	
NumberClosed systemCodeBCBCApprox. height (mm)30Entrance positionCovered outdoor areas, gateways, passagesZones: I - II - IIIZone: IILoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):ApyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Logo options:Logo engraving	Ideal for:	Coarse dirt, fine dirt and moisture
CodeBCBCApprox. height (mm)30Entrance positionCovered outdoor areas, gateways, passagesZones: I - II - IIIZone: IILoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):AnyMat deityisions as per factory standards or ustomer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Veight (kg/m²)Cca 30Logo options:Logo engraving	Colors:	Black, Grey, Brown
Approx. height (mm)30Entrance positionCovered outdoor areas, gateways, passagesZones: I - II-IIIZone: IILoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual sectif (mm):Go00Max depth/walking depth for individual unts (mm):Cca 30Depth for individual units (mm):Cca 30Veight (kg/m²)Cca 30Kutegor (kg/m²)Logo engraving	Version	Closed system
Interact positionCovered outdoor areas, gateways, passagesEntrance positionZone: ILoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyDepth for individual units (mm):Cca 30Logo options:Logo engraving	Code	BCBC
Zones: I - II - IIIZone: ILoadExtremeFootfallDaily footfall of 5000 and upRol-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Ca 30Veight (kg/m²)Ca 30Logo options:Logo engraving	Approx. height (mm)	30
LoadExtremeFootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):AnyMat divisions as per factory standards or sustomer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Veight (kg/m²)Cca 30Logo options:Logo engraving	Entrance position	Covered outdoor areas, gateways, passages
FootfallDaily footfall of 5000 and upRoll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Mat depth/walking depth for individual units (mm):AnyDepth for individual units (mm):Cca 30Depth for individual units (mm):Cca 30Weight (kg/m²)Cca 30Logo options:Logo engraving	Zones: I – II - III	Zone: II
Roll-over and drive-over capability:Wheelchairs, Prams, Hand and Light shopping trolleysSupport chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Mat depth/walking depth for individual units (mm):AnyDepth for individual units (mm):Cca 30Stationary load kg/100cm22200Weight (kg/m2)Cca 30Logo options:Logo engraving	Load	Extreme
Support chassisMade from rigid anodized aluminum with rubber sound insulation underlayAluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Keight (kg/m²)Cca 30Logo options:Logo engraving	Footfall	Daily footfall of 5000 and up
Aluminum coating:Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving	Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
Aluminum material thickness (mm)1.2ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyDepth for individual units (mm):Cca 30Depth for individual units (mm):2200Stationary load kg/100cm²Cca 30Logo options:Logo engraving	Support chassis	Made from rigid anodized aluminum with rubber sound insulation underlay
ConnectionStrong PVC connection strip, the entire widthStandard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Logo engraving	Aluminum coating:	
Standard profile clearance approx. (mm)0 mm closed systemSlip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving	Aluminum material thickness (mm)	1.2
Slip resistanceR 11 slip resistance as per DIN 51130Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving	Connection	Strong PVC connection strip, the entire width
Max width/profile length for each individual section (mm):6000Max depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving	Standard profile clearance approx. (mm)	0 mm closed system
individual section (mm):AnyMax depth/walking depth for individual units (mm):AnyMat divisions as per factory standards or customer specificationsRecommended maximum mat weight of 45 kgDepth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving	Slip resistance	R 11 slip resistance as per DIN 51130
units (mm):Addition of the second		6000
customer specificationsCa 30Depth for individual units (mm):Cca 30Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving		Any
Stationary load kg/100cm²2200Weight (kg/m²)Cca 30Logo options:Logo engraving		Recommended maximum mat weight of 45 kg
Weight (kg/m²)Cca 30Logo options:Logo engraving	Depth for individual units (mm):	Cca 30
Logo options: Logo engraving	Stationary load kg/100cm ²	2200
	Weight (kg/m²)	Cca 30
Contact STILMAT	Logo options:	Logo engraving
	Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction

