



ZONE



HEIGHT (mm)



STILMAT BARON

Ribbed carpet- open

Code: B0L



The BARON is the highest aludoormat in range. For picking up significant amounts of coarse. Imagine your impressive entrance with BARON STILMAT doormat. Suitable for internal use and for extreme frequency of passengers. This model is with high quality ribbed carpet for public, ideal for picking up fine dirt and moisture. Anodized aluminum doormat model with 29mm height. The weather-proof solution among the robust solution.



Ideal for: Fine dirt and moisture



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving

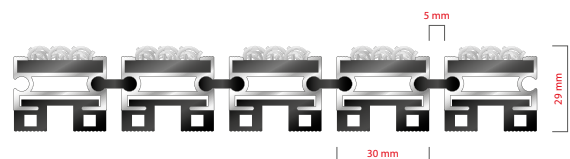

STILMAT BARON

Ribbed carpet- open

Code: BOL

| Model | BARON (Ribbed carpet) |
|---|---|
| Tread surface (inlay): | High quality ribbed carpet for Public buildings (A+EFL) , durable and luxurious character. Made from 100% Polyamide with gel backing. Weather-proof |
| Colors: | Black, Grey, Brown... |
| Ideal for: | Fine dirt and moisture |
| Version | Open system |
| Code | BOL |
| Approx. height (mm) | 29 |
| Entrance position | Indoors |
| Zones: I – II – III | Zone: III |
| Load | Extreme |
| Footfall | Daily footfall of 2000 and up |
| Roll-over and drive-over capability: | Wheelchairs, Prams, Hand and Light shopping trolleys |
| Support chassis | Made from rigid anodized aluminum with rubber sound insulation underlay |
| Aluminum coating: | Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum. |
| Aluminum material thickness (mm) | 1.2 |
| Connection | Strong and flexible PVC connection strip, the entire width |
| Standard profile clearance approx. (mm) | 5 mm (optional 3mm for automatic/revolving doors) |
| Slip resistance | R 11 slip resistance as per DIN 51130 |
| Max width/profile length for each individual section (mm): | 6000 |
| Max depth/walking depth for individual units (mm): | Any |
| Mat divisions as per factory standards or customer specifications | Recommended maximum mat weight of 45 kg |
| Depth for individual units (mm): | Cca 29 |
| Stationary load kg/100cm ² | 2200 |
| Weight (kg/m ²) | Cca 25 |
| Logo options: | Logo engraving |
| Contact | STILMAT |

Guarantee: 5 years on aluminum parts and construction