



# STILMAT DESIGNO™ FIRE GUARD


Code: DS-DCCFG



**DESIGNO STILMAT™ - Fire guard is different. You can see that right away. Highest level of flammability in our offer (Bfl-s1). Premium quality. Excellent performance of absorbing and scraping. . Choose DESIGNO STILMAT™ entrance matting for commercial areas where moisture absorption and dirt scraping are key considerations.**

## Description

Special and high quality Dust Control Carpet rug for covered and indoor areas. Suitable for intensive covered and indoor foot traffic – Entrance areas, halls, stairwells, pantries, lifts. Enduring dirt-concealing capabilities and hard-wearing.

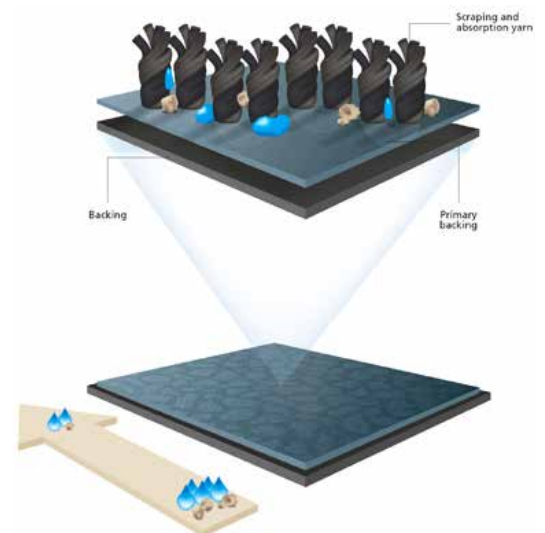

- Unique design with highest level of flammability
- Better Scraping – Where moisture absorption and dirt scraping are key considerations.
- Anti static- Dirt and moisture are stopped and contained
- Absorption capacity – 4.8 l/m<sup>2</sup>
- Total weight 3.800g/m<sup>2</sup>
- Savings on cleaning cost up to 65% are possible
- Fine dirt in the air will be prevented and avoided considerable cost in cleaning
- Health- Improves indoor air quality (Sick building syndrome)
- Flammability – Fire Safety - Euroclass 13501 (Norm Bfl-s1)
- Slip resistance EN13893 – DS
- Reduces noise levels – Height 9mm with heavy coating PVC backing
- High quality yarn – Velour structure with a high pile. The pile design, comprising both coarse and soft yarns
- Rubber border/edge – upon request
- Luxury appearance-dirt is barely visible in the mat's blended design. Fits any setting
- Made in Netherlands




# STILMAT DESIGNO™ FIRE GUARD


Code: DS-DCCFG

FIRE  
GUARD

Model	DESIGNO - Fire guard
Group	Superior design Indoor, High traffic, Super absorbing
Code	DS-DCCFG
Pile material	100% Polyamide
Backing	PVC
Primary backing	Nonwoven PET/PA
Yarn construction	Velour
Pattern	Grafic
Colors	5
Pile weight ISO 8543	± 1000 gram/m <sup>2</sup>
Total weight ISO 8543	± 3.800 gram/m <sup>2</sup>
Pile height ISO 1766	± 7 mm
Total height ISO 1765	± 9 mm
Pile density ISO 8543	0,128 g/cm <sup>3</sup>
Number of stitches ISO 1763	± 86.800 /m <sup>2</sup>
Use classification EN 1307	33
Wearing class EN 1963	33
Comfort EN 1307	LC3
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimension stability ISO 2551	<0,4%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4
Rubbing fastness ISO 105 X12	4
Salt water ISO 105 E02	4
Shampoo BS 1006	4
Organic solvents ISO 105 X05	4
Absorption capacity TNO W6034	+ 4.8 l/m <sup>2</sup>
Flammability Euroclass EN13501	Bfl /s1
Slip Resistance EN13893	DS
Static charge ISO 6356	2.0 kV
Sand absorption 1-3	3
Optical class 1-5	4.5
Sizes rolls	2000mm Width
Rubber border/edge	Upon request
Quality class	Luxury, fire resistant (Bfl/s1), for commercial buildings
Ideal position on entrance	Covered or indoor space with high traffic
Zone: I – II – III	II, III
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).



Grafic Comb



Grafic Grid



Grafic Rings



Grafic Squares



Grafic Stone

	High traffic	Medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	