



STILMAT™ MASTER BRUSH


Code: MB-DCC



Unique offer. Master brush STILMAT is a special outdoor mat that pairs scraping qualities with moisture absorption. Textile look. Weather resistant. Premium quality and appearance with characteristics of STILMAT lux brushes, it replaces all three inlays (brush, rubber, carpet) in STILMAT aluminum doormats.

Description

Special and high quality Dust Control Carpet rug for outdoor and covered areas. Suitable for intensive foot traffic. Enduring dirt-concealing capabilities and hard-wearing.

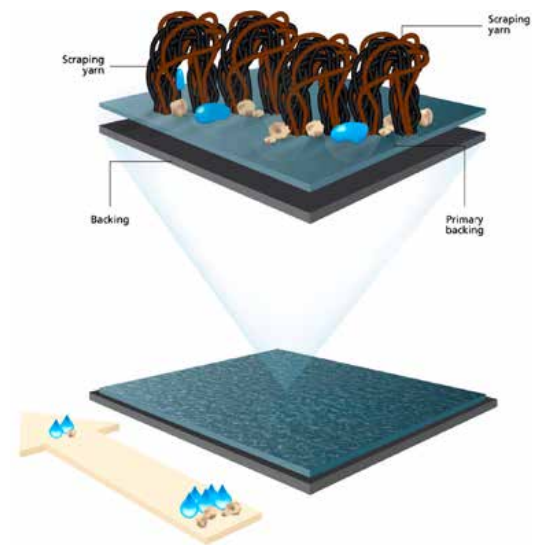

- Unique outdoor mat
- Better Scraping – Where moisture absorption and dirt scraping are key considerations.
- Weather resistant
- Anti static - Dirt and moisture are stopped and contained
- Absorption capacity – 3.8 l/m²
- Total weight 3.000g/m²
- Savings on cleaning cost up to 65%
- Fine dirt in the air will be prevented and considerable cost in cleaning avoided
- Health- Improves indoor air quality (Sick building syndrome)
- Flammability – Fire Safety - Euroclass 13501 (Norm Cfl-s1)
- Slip resistance EN13893 – DS
- Reduces noise levels – Height 9 mm with heavy coating PVC backing
- High quality yarn – Boucle structure with a high pile. The pile design, comprising coarse yarns
- Rubber border/edge – upon request
- Luxury appearance-dirt is barely visible in the mat's blended design. Fits any setting
- Made in Netherlands



STILMAT MASTER BRUSH


Code: MB-DCC




Model	MASTER BRUSH
Group	Outdoor, High traffic, super absorbing
Code	MB-DCC
Pile material	100% Polyamide
Backing	PVC
Primary backing	Nonwoven PET/PA
Yarn construction	Bouclé construction
Pattern	Blended
Colors	3
Pile weight ISO 8543	± 600 gram/m ²
Total weight ISO 8543	± 3.000 gram/m ²
Pile height ISO 1766	± 6.5 mm
Total height ISO 1765	± 9 mm
Pile density ISO 8543	0,079 g/cm ³
Number of stitches ISO 1763	± 64.500 /m ²
Use classification EN 1307	33
Wearing class EN 1963	33
Comfort EN 1307	LC1
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimension stability ISO 2551	<0,4%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4-5
Rubbing fastness ISO 105 X12	4-5
Salt water ISO 105 E02	4-5
Shampoo BS 1006	4-5
Organic solvents ISO 105 X05	4-5
Absorption capacity TNO W6034	+/- 3.8 l/m ²
Flammability Euroclass EN13501	Cfl /s1
Slip Resistance EN13893	DS
Static charge ISO 6356	0.1 kV
Sand absorption 1-3	2
Optical class 1-5	4.5
Sizes rolls	2000mm Width
Rubber border/edge	Upon request
Quality class	Luxury, for commercial buildings
Ideal position on entrance	Outdoor and covered space with high traffic
Zone: I – II – III	I, II
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).



Anthracit 007



Brawn 014



Red 016

