



STILMAT PRESTIGE™ GREEN CONCEPT


Code: PS-DCCGC



The PRESTIGE STILMAT™ is indoor durable mat, runner or inlay, with luxurious character which is also Eco-friendly entrance mat and it is a part of STILMAT Green Concept™ program. This mat is ideal for high moisture absorption and works best in combination with STILMAT outdoor mat. It can be used as inlay for any STILMAT aluminum doormat model, indoor mat or runner rug.

Description

Special and high quality Dust Control Carpet rug for covered and indoor areas. The PRESTIGE STILMAT™ is indoor durable mat, runner or inlay, with luxurious character. The mat is ideal for high moisture absorption. Manufactured from ECONYL® material with s-FLX backing (PVC FREE), in accordance with A+, VOC, EMS 14001 standards, which are part of LEED standard. A flexible backing of PU which neither contains Chlorides nor Plasticizers.

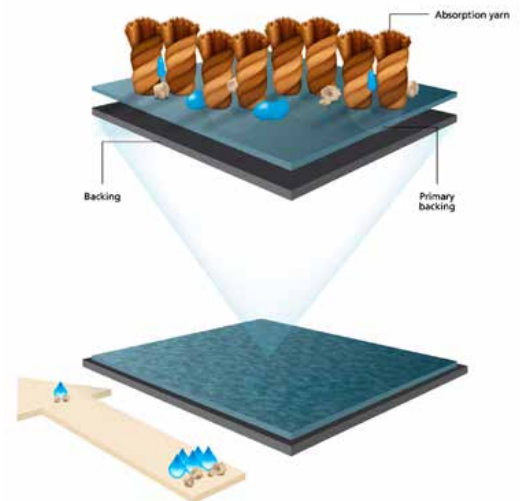

- Indoor durable mat for high moisture absorption and dirt scraping
- Eco-Friendly carpet which is in accordance with A+,VOC, EMS and LEED standard
- Anti static- Dirt and moisture are stopped and contained
- Absorption capacity – 6.4 l/m2
- Total weight 3.700g/m2
- Savings on cleaning cost up to 65% are possible
- Fine dirt in the air will be prevented and considerable cost in cleaning avoided
- Health- Improves indoor air quality (Sick building syndrome)
- Slip resistance EN13893 – DS
- Reduces noise levels – Height 9 mm with heavy coating PU (PVC FREE) backing
- High quality yarn – Velour structure with a high pile.
- Rubber border/edge – upon request
- Luxury appearance-dirt is barely visible in the mat's blended design. Fits any setting
- Made in Netherlands




STILMAT PRESTIGE™ GREEN CONCEPT


Code: PS-DCCGC




| Model | PRESTIGE STILMAT - Green concept |
|--------------------------------------|---|
| Group | Indoor, High traffic, super absorbing |
| Code | PS-DCCGC |
| Pile material | 100% Polyamide |
| Backing | PU |
| Primary backing | Nonwoven PET/PA |
| Yarn construction | Velour |
| Pattern | Blended |
| Colors | 7 |
| Pile weight ISO 8543 | ± 900 gram/m ² |
| Total weight ISO 8543 | ± 2.800 gram/m ² |
| Pile height ISO 1766 | ± 6.5 mm |
| Total height ISO 1765 | ± 9.0 mm |
| Pile density ISO 8543 | 0,155 g/cm ³ |
| Number of stitches ISO 1763 | ± 71.500 /m ² |
| Use classification EN 1307 | 32 |
| Wearing class EN 1963 | 33 |
| Comfort EN 1307 | LC3 |
| Suitability for stairs EN 1963 | Intensive use |
| Suitability for castor chairs EN 985 | Intensive use |
| Dimension stability ISO 2551 | <0,2% |
| Light fastness ISO 105 B02 | >7 |
| Water fastness ISO 105 B01 | 4-5 |
| Rubbing fastness ISO 105 X12 | 4-5 |
| Salt water ISO 105 E02 | 4-5 |
| Shampoo BS 1006 | 4-5 |
| Organic solvents ISO 105 X05 | 4-5 |
| Absorption capacity TNO W6034 | +/- 6.4 l/m ² |
| Flammability Euroclass EN13501 | Cfl /s1 |
| Slip Resistance EN13893 | DS |
| Static charge ISO 6356 | 0.1 kV |
| Sand absorption 1-3 | 2 |
| Optical class 1-5 | 4 |
| Sizes rolls | 2000 mm Width |
| Rubber border/edge | Upon request |
| Quality class | Luxury, for commercial buildings |
| Ideal position on entrance | Outdoor and covered space with high traffic |
| Zone: I – II – III | II,III |
| Cleaning | Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra). |




Antra 980




Beige 981



Brown 982



Red 983



Black 985



Indigo 986



Granite 989

| | High traffic | Medium traffic |
|-----------------------------------|--------------|----------------|
| Not combined with outdoor matting | A | B |
| Combined with outdoor matting | C | D |
| Outdoor matting | E | |