



STILMAT PRESTIGE™ STANDARD


Code: CO-DCC



The PRESTIGE STILMAT™ is indoor durable mat, runner or inlay, with luxurious character. The mat is ideal for high moisture absorption and works best in combination with an STILMAT outdoor mat. The PRESTIGE STILMAT® is suitable for heavy use, for example, in entrance areas, stairwells, lifts. It can be used as an inlay for any STILMAT aluminum doormat model, indoor mat or runner rug.

Description

Special and high quality Dust Control Carpet rug for covered and indoor areas. The PRESTIGE STILMAT is an indoor durable mat, runner or inlay, with luxurious character. This mat is ideal for high moisture absorption. Suitable for intensive covered and indoor foot traffic – Entrance areas, halls, stairwells, pantries, lifts. Enduring dirt-concealing capabilities and hard-wearing.

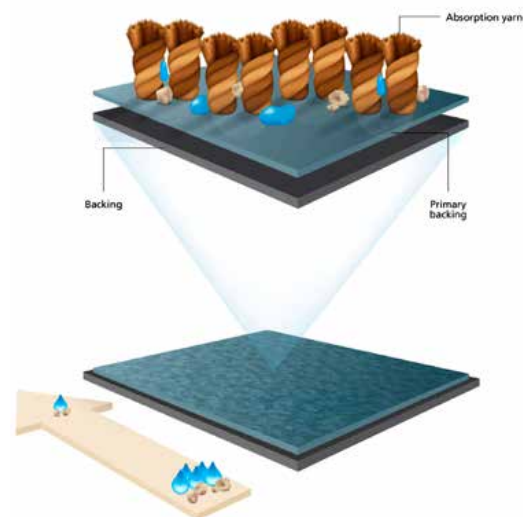

- Indoor durable mat for high moisture absorption and dirt scraping
- Anti static- Dirt and moisture are stopped and contained
- Absorption capacity – 6.4 l/m²
- Total weight 3.700g/m²
- Savings on cleaning cost up to 65%
- Fine dirt in the air will be prevented and avoided considerable cost in cleaning
- Health- Improves indoor air quality (Sick building syndrome)
- Flammability – Fire Safety - Euroclass 13501 (Norm Cfl-s1)
- Slip resistance EN13893 – DS
- Reduces noise levels – Height 9 mm with heavy coating PVC backing
- High quality yarn – Velour structure with a high pile.
- Rubber border/edge – upon request
- Luxury appearance-dirt is barely visible in the mat's blended design. Fits any setting
- Made in Netherlands




STILMAT PREMIUM™ STANDARD


Code: CO-DCC




Model	PRESTIGE STILMAT
Group	Indoor, High traffic, super absorbing
Code	PS-DCC
Pile material	100% Polyamide
Backing	PVC
Primary backing	Nonwoven PET/PA
Yarn construction	Velour
Pattern	Blended
Colors	7
Pile weight ISO 8543	± 900 gram/m ²
Total weight ISO 8543	± 3.700 gram/m ²
Pile height ISO 1766	± 6.5 mm
Total height ISO 1765	± 9.0 mm
Pile density ISO 8543	0,155 g/cm ³
Number of stitches ISO 1763	± 71.500 /m ²
Use classification EN 1307	32
Wearing class EN 1963	33
Comfort EN 1307	LC3
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimension stability ISO 2551	<0,2%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4-5
Rubbing fastness ISO 105 X12	4-5
Salt water ISO 105 E02	4-5
Shampoo BS 1006	4-5
Organic solvents ISO 105 X05	4-5
Absorption capacity TNO W6034	+ - 6.4 l/m ²
Flammability Euroclass EN13501	Cfl /s1
Slip Resistance EN13893	DS
Static charge ISO 6356	0.1 kV
Sand absorption 1-3	2
Optical class 1-5	4
Sizes rolls	2000 mm Width
Rubber border/edge	Upon request
Quality class	Luxury, for commercial buildings
Ideal position on entrance	Outdoor and covered space with high traffic
Zone: I – II – III	II,III
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).




Anthracite 930



Brown 932



Blue 936



Grey 938



Red 939

	High traffic	Medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	