



STILMAT PRESTIGE™ STANDARD

Code: CO-DCC




Premium kvalitet i karakteristike. Idealan je za upijanje velike vlage sa obuće, a savršen u kombinaciji sa spoljnim grubljim STILMAT otiračem. Zbog svoje strukture i dizajna tkanja čini da nečistoće budu nevidljive i lako se održavanja. Jak i otporan materijal skida i upija nečistoće. Za spoljne i natkrivene ulaze poslovnih i stambenih objekata sa visokom frekvencijom prolaznika.

Opis

PRESTIGE STILMAT jedinstvena tkanina namenjena za sve vrste unutrašnjih ulaza gde je potrebno efikasno uklanjanje svih nečistoća i posebno upijanje vlage sa obuće. Manje nečistoće propadaju kroz tkaninu, ne raznose se i nisu vidljive na površini, a opet kod čišćenja lako izlaze. Može biti izrađen kao ispuna STILMAT aluminijumskih otirača, kao poseban unutrašnji otirač ili kao tepih staza.

- Jedinstven, izdržljiv, luksuznog karaktera – unutrašnji otirač, staza ili ispuna
- Antistatički – zadržava nečistoću i vlagu
- Moć upijanja – 6.4 l/m² !
- Težina 3.700g/m²
- Omogućuju uštedu troškova čišćenja i do 65%.
- Uticaj na zdravlje – utiču na poboljšanje kvaliteta vazduha u objektu
- Zapaljivost Euroclass EN13501 – Antizapaljivi (Norm Cfl – s1)
- Otpornost na klizanje EN13893- Protivklizni (DS)
- Smanjuju nivo buke – debljina od 9 mm sa teškim slojem PVC podloge
- Visokokvalitetno predivo – puna struktura. Kombinovano grubo predivo.
- Gumena ivica/bordura – na zahtev kupca
- Luksuzni izgled – uklopivi uz svaki enterijer, a nečistoće su teško uočljive, zbog kombinovanih prediva
- Made in Netherland

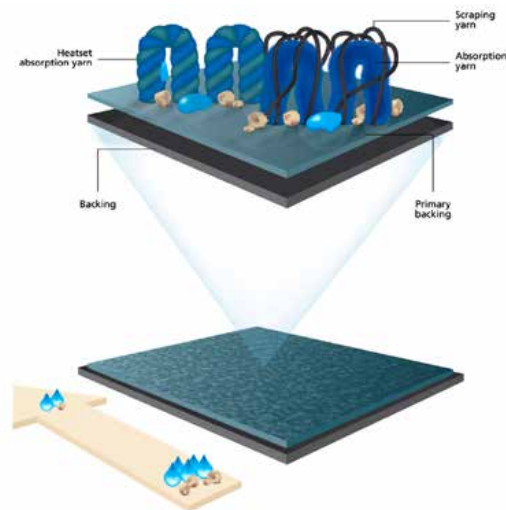


STILMAT PREMIUM™ STANDARD


Code: CO-DCC




Model	PRESTIGE STILMAT
Group	Indoor, High traffic, super absorbing
Code	PS-DCC
Pile material	100% Polyamide
Backing	PVC
Primary backing	Nonwoven PET/PA
Yarn construction	Velour
Pattern	Blended
Colors	7
Pile weight ISO 8543	± 900 gram/m ²
Total weight ISO 8543	± 3.700 gram/m ²
Pile height ISO 1766	± 6.5 mm
Total height ISO 1765	± 9.0 mm
Pile density ISO 8543	0,155 g/cm ³
Number of stitches ISO 1763	± 71.500 /m ²
Use classification EN 1307	32
Wearing class EN 1963	33
Comfort EN 1307	LC3
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimension stability ISO 2551	<0,2%
Light fastness ISO 105 B02	>7
Water fastness ISO 105 B01	4-5
Rubbing fastness ISO 105 X12	4-5
Salt water ISO 105 E02	4-5
Shampoo BS 1006	4-5
Organic solvents ISO 105 X05	4-5
Absorption capacity TNO W6034	+ - 6.4 l/m ²
Flammability Euroclass EN13501	Cfl /s1
Slip Resistance EN13893	DS
Static charge ISO 6356	0.1 kV
Sand absorption 1-3	2
Optical class 1-5	4
Sizes rolls	2000 mm Width
Rubber border/edge	Upon request
Quality class	Luxury, for commercial buildings
Ideal position on entrance	Outdoor and covered space with high traffic
Zone: I – II – III	II,III
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).




Anthracite 930



Brown 932



Blue 936



Grey 938



Red 939

	High traffic	Medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	