




ZONA ČIŠČENJA

VISINA (mm)

## STILMAT VICE PRESIDENT

Rubber/Ribbed carpet - open

Code: VORL

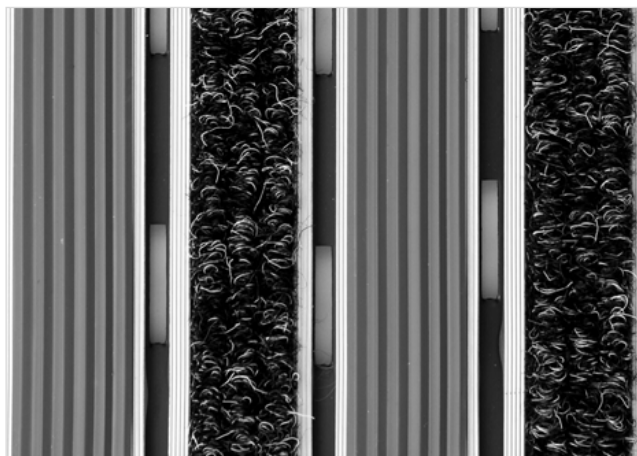

The VICE PRESIDENT is an aluminum doormat with the most in demand height and it is a "budget-friendly" model. With its proven design and rigid profiles it meets the basic characteristics of similar Stilmat doormat models. Imagine your impressive entrance with VICE PRESIDENT STILMAT doormat. Suitable for internal use and for heavy frequency of passengers. This model is with profiled rubber inserts and high quality ribbed carpet ideal for picking up coarse dirt, fine dirt and moisture. Anodized aluminum doormat model with 22mm height. The weather-proof solution among the robust solution.



Vrsta prljavštine: Krupna i sitna



Otpornost: Na sve vremeske uslove




Karakteristike: Prelaz kolicima



Završna obrada: Elokisirano



Mogućnost dodavanje  
Logotipa kompanije

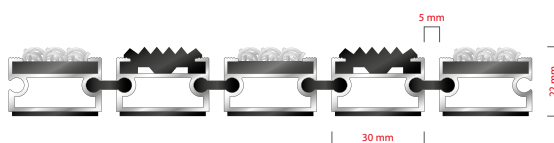

# STILMAT VICE PRESIDENT

Rubber/Ribbed carpet - open

**Code: VORL**

Model	VICE PRESIDENT (Rubber & Ribbed carpet)
Tread surface (inlay):	Profiled rubber inserts and High quality ribbed carpet for Public buildings (A+EFL) , durable and luxurious character. Made from 100% Polyamide with gel backing. Weather-proof
Ideal for	Coarse dirt, fine dirt and moisture
Colors:	Black, Grey, Brown...
Version	Open system
Code	VORL
Approx. height (mm)	22
Entrance position	Covered outdoor areas, gateways, passages
Zones: I – II - III	Zone: II
Load	Extreme
Footfall	Daily footfall of 2000 and up
Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
Support chassis	Made from rigid aluminum with foam sound insulation underlay
Aluminum material thickness (mm)	1.2
Connection	Strong and flexible PVC connection strip, the entire width
Standard profile clearance approx. (mm)	5 mm (or 3mm for automatic/revolving doors)
Slip resistance	Rubber R12 wet, R13 dry - Ribbed carpet DS
Max width/profile length for each individual section (mm):	6000
Max depth/walking depth for individual units (mm):	Any
Mat divisions as per factory standards or customer specifications	Recommended maximum mat weight of 45 kg
Depth for individual units (mm):	Cca 22
Stationary load kg/100cm <sup>2</sup>	2200
Weight (kg/m <sup>2</sup> )	Cca 20
Logo options	Logo engraving
Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction