



ZONE

HEIGHT (mm)

STILMAT BARON

Ribbed carpet - closed

Code: BCL



The BARON is the highest aludoormat in range. The alternative system with closed design. Imagine your impressive entrance with BARON STILMAT doormat. Suitable for internal use and for heavy to extreme frequency of passengers. This model is ideal for picking up fine dirt and moisture. Anodized aluminum doormat model with 29 mm height and high quality ribbed carpet for public buildings. The weather-proof solution among the robust solution.



Ideal for: Fine dirt and moisture



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving

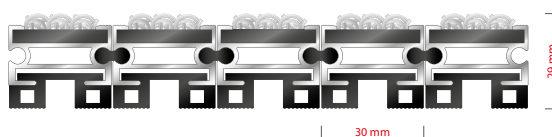

STILMAT BARON

Ribbed carpet - closed

Code: BCL

Model	BARON (Ribbed carpet)
Tread surface (inlay):	High quality ribbed carpet for Public buildings (A+EFL) , durable and luxurious character. Made from 100% Polyamide with gel backing. Weather-proof
Ideal for:	Fine dirt and moisture
Colors:	Black, Grey, Brown...
Version	Closed system
Code	BCL
Approx. height (mm)	29
Entrance position	Indoors
Zones: I – II - III	Zone: III
Load	Extreme
Footfall	Daily footfall of 5000 and up
Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
Support chassis	Made from rigid anodized aluminum with rubber sound insulation underlay
Aluminum coating:	Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.
Aluminum material thickness (mm)	1.2
Connection	Strong PVC connection strip, the entire width
Standard profile clearance approx. (mm)	0 mm closed system
Slip resistance	R 11 slip resistance as per DIN 51130
Max width/profile length for each individual section (mm):	6000
Max depth/walking depth for individual units (mm):	Any
Mat divisions as per factory standards or customer specifications	Recommended maximum mat weight of 45 kg
Depth for individual units (mm):	Cca 29
Stationary load kg/100cm ²	2200
Weight (kg/m ²)	Cca 30
Logo options:	Logo engraving
Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction